


A new innovation in safety protection, the NoiseBuster<sup>®</sup> Active Noise Reduction Safety Earmuff combines superior passive hearing protection with the most advanced active noise reduction (ANR) technology. The NoiseBuster ANR Safety Earmuff is specifically designed for the industrial worker. It is also an excellent choice for do-it-yourself users of lawn mowers and power tools, as well as for motor sports fans when used in conjunction with scanners. You can even listen to your portable audio player while wearing your NoiseBuster ANR Safety Earmuff. The product has a passive Noise Reduction Rating (NRR) of 26dB (depending upon the model). Additionally the NoiseBuster delivers up to 20dB of ANR in the low frequency range. Get the highest-performing hearing protector available — at an unbelievably low price!

### What is Active Noise Reduction (ANR)?

NoiseBuster ANR Safety Earmuff uses a microphone inside the ear cup (1) to listen to noise coming into the ear (2). Using electronics (3), the system takes that information and uses it to create a noise wave that is identical to, but directly opposite of, the one coming into the ear. The “anti-noise” wave is output through a speaker (4), also located in the ear cup. When the two waves (the noise wave and the anti-noise wave) meet, the noise is significantly reduced (5).

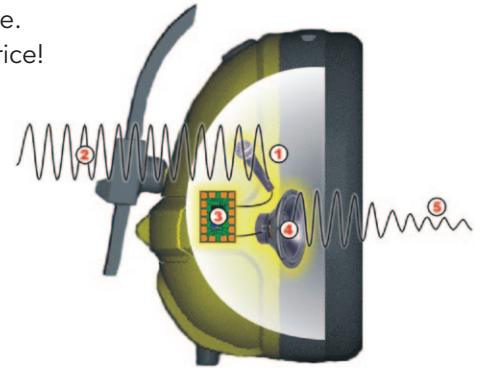

### ANR Protection

ANR is the most effective defense against low-frequency noise. Low-frequency noise consists of powerful sound waves that can travel great distances and cannot be absorbed by conventional passive materials. Noises generated by engines, blowers, motors, fans, vacuums, pumps, generators and other similar devices are typically dominated by low frequencies—frequencies that cannot be stopped by passive earmuffs. In addition to the detrimental effect it has on hearing, low-frequency noise creates another, perhaps even more serious effect. Because low-frequency noise masks speech, it is difficult for a person to hear and comprehend speech and warning signals when exposed to such noise.



Model PA4000 - Over-The-Head



Model PA4100 - Behind-The-Head



Model PA4200 - Hard Hat Cap Mount

**Features**

- Industrial grade, professional hearing protector
- On/off switch and power indicator
- Stereo input 3.5 mm audio jack
- Up to 65 hours of use on a single AA battery
- Adjustable headband (PA4000)
- Adjustable Velcro headband (PA4100)
- Resistant to water and moisture, contaminants, mechanical shock and vibration

**Includes**

- NoiseBuster ANR Safety Earmuff
- Velcro Headband (PA4100)
- Two Hard Hat Clip Shims (PA4200)
- One AA battery
- 3.5 mm audio interface cable
- Warranty - 6 months
- User Guide

**Specifications**

- Storage temperature: -40C to +85C
- Operating temperature: 0C to +55C
- Audio cable length: 50cm (20 inches)
- Power: One AA battery

**Active Noise Reduction**

ANR performance range: Between 20Hz and 800Hz  
 ANR attenuation: Up to 20dB

**Attenuation Data**

ANSI S3.19-1974, AS/NZS 1270:2002, testing by  
 Dr. Kevin Michael & Associates, State College, Pennsylvania, USA

**PA4000** - NRR 26, CSA A, SLC (80), 29.2 Class 5

**PA4100** - NRR 24, CSA A, SLC (80), 23.3 Class 4

**PA4000** - NRR 25, CSA A, SLC (80), 24.7 Class 4

**Plus additional low frequency Noise Reduction up to 20dB for all models**

**Product Packaging Details**

UPC: 768235286001  
 (Model/Part No: PA4000)  
 UPC: 768235286018  
 (Model/Part No: PA4100)  
 UPC: 768235286025  
 (Model/Part No: PA4200)  
 Product weight: 16 oz.  
 (with battery inserted)

Individual Package dimensions:  
 9.0" x 8.5" x 4.5"  
 Individual Package weight: 1 lb., 8oz.  
 Master carton: 8 units  
 Master carton dimension:  
 19" x 19" x 11"  
 Master carton cube: 1.88 cubic feet  
 Master carton weight: 14.5 lb.



Model PA4000 - Over-The-Head



Model PA4100 - Behind-The-Head



Model PA4200 - Hard Hat Cap Mount